

EFL1603-HV/ EFL1803-HV



High Capacity Electric Counterbalanced Forklift 16-18T



Company brand			TRIA	TRIA	TRIA	TRIA
Model designation			EFL1603-HV-9	EFL1603-HV-12	EFL1803-HV-9	EFL1803-HV-12
Drive			Electric	Electric	Electric	Electric
Load capacity	Q	kg	16000	16000	18000	18000
Load center distance	c	mm	900	1200	900	1200
Service weight		kg	23580	24100	24100	26800
Retracted mast height	h1	mm	3640	3640	3700	3700
Lift height	h3	mm	4000	4000	4000	4000
Height, mast extended	h4	mm	5600	5600	5700	5700
Length to face of forks	l2	mm	5195	5550	5550	5550
Overall width	b1/b2	mm	2570/2475	2570/2500	2570/2500	2570/2500
Fork dimensions	s/e/l	mm	90/200/1820	90/200/2400	100/220/1820	100/220/2400
Turning radius	Wa	km/h	4950	5175	5175	5175
Travel speed, laden/unladen		m/s	20/20	20/20	20/20	20/28
Lifting speed, laden/unladen		m/s	0.35/0.4	0.4/0.45	0.35/0.4	0.4/0.45
Lowering speed, laden/unladen		%	0.5/0.35	0.5/0.4	0.5/0.35	0.5/0.4
Drive motor rating S2 60 min		kW	90	90	90	90
Battery voltage/nominal capacity		V/Ah	618.24/228	618.24/228	618.24/228	618.24/228



Rua Murilo de Campos Castro, 27 - Pq Rural Fazenda Santa Cândida - Campinas/SP
CEP: 13087-541 | Telefone: (19) 3256-2800 | www.tria.log.br | contato@tria.log.br



Standard Configuration

- Fork length 1820/2400mm (900/1200mm LC)
- Roller-guided forks
- Fork positioner with sideshift
- Mast lifting and lowering buffer
- Pneumatic tyres (solid tyres for certain markets)
- 618.24V/228Ah LFP battery
- Reversing buzzer
- Battery heating function when charging
- PMSM technology traction and lifting motors
- VCU EPEC (Finland)
- USB interface 5V
- Telematics
- All weather cabin with rubber damping frame connection, heater and air conditioner, defrost and defogging function and electro-hydraulic tilting function
- Multi-function joystick for hydraulic controls
- Suspended Grammer 85/722 seat with armrest, heating and OPS
- Back distance sensor and rear camera with LCD display
- 20kW external charger, 340-460V, 50~60Hz, 32A plug
- LED front working light on mast and mudguards, Front and rear lights, back blue spot, Strobe warning light, rear and front steering lights, area warning lights on the left, right and rear



Options list

- Different fork length customization
- Pin type forks/ forks with terminal west
- Customized fork carriage (width and type)
- Wide selection of duplex and triplex mast with elevations up to 7000mm
- Solid tyres / non marking tyres
- Customized fast charger 60-120kw available
- Cigarette lighter interface 12V
- Reverse voice horn (English)
- Front bluespot
- Rotating warning light / rotating buzzer warning light
- 40kW external charger, 340-460V, 50~60Hz, 63A plug



Li-ion High Capacity Truck 16T

EFL1603-HV

Distinguishing mark	1.1	Company brand			TRIA	TRIA
	1.2	Model designation			EFL1603-HV-9	EFL1603-HV-12
	1.3	Drive			Electric	Electric
	1.4	Operator type			seated	seated
	1.5	Load capacity	Q	kg	16000	16000
	1.6	Load center distance	c	mm	900	1200
	1.8	Load distance, centre of drive axle to fork	x	mm	950	950
	1.9	Wheelbase	y	mm	3500	3750
Service weight	2.1	Service weight		kg	23580	24100
	2.2	Axle loading, laden front/rear		kg	36800/2780	37070/3030
	2.3	Axle loading, unladen front/rear		kg	11580/12000	11800/12300
Tyres/chassis	3.1	Tyre type			pneumatic	pneumatic
	3.2	Tyre size, front			12.00-20-20PR	12.00-20-20PR
	3.3	Tyre size, rear			12.00-20-20PR	12.00-20-20PR
	3.5	Wheels, number front/rear (x=drive wheels)		mm	4x/2	4x/2
	3.6	Tread width, front	b10	mm	1880	1880
Dimensions	3.7	Tread width, rear	b11	mm	2200	2200
	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/12	6/12
	4.2	Retracted mast height	h1	mm	3640	3640
	4.3	Free lift	h2	mm	100	100
	4.4	Lift height	h3	mm	4000	4000
	4.5	Height, mast extended	h4	mm	5600	5600
	4.7	Height of overhead guard (cabin)	h6	mm	3160	3160
	4.8	Seat height/standing height	h7	mm	2000	2000
	4.12	Tow coupling height	h10	mm	430	430
	4.19	Overall length	l1	mm	7015	7950
	4.20	Length to face of forks	l2	mm	5195	5550
	4.21	Overall width	b1/b2	mm	2570/2475	2570/2500
	4.22	Fork dimensions	s/e/l	mm	90/200/1820	90/200/2400
	4.24	Fork carriage width	b3	mm	2500	2500
	4.31	Ground clearance, laden, below mast	m1	mm	155	155
	4.32	Ground clearance, center of wheelbase	m2	mm	300	265
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	7920	8725
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	7920	8725
	4.35	Turning radius	Wa	mm	4950	5175
Performance data	5.1	Travel speed, laden/unladen		km/ h	20/20	20/20
	5.2	Lifting speed, laden/unladen		m/s	0.35/0.4	0.4/0.45
	5.3	Lowering speed, laden/unladen		m/s	0.5/0.35	0.5/0.4
	5.5	Drawbar pull, laden/unladen		N	92000/92000	92000/92000
	5.6	Max. drawbar pull, laden/unladen		N	95000/95000	95000/95000
	5.8	Max. gradeability, laden/unladen		%	20/30	20/30
	5.10	Service brake			Hydraulic	Hydraulic
Electric-engine	5.11	Parking brake			Hydraulic	Hydraulic
	6.1	Drive motor rating S2 60 min		kW	90	90
	6.2	Lift motor rating at S3 15%		kW	60	60
	6.4	Battery voltage/nominal capacity		V/Ah	618.24/228	618.24/228
	6.5	Battery weight		kg	932	932
	6.6	Periodic energy consumption according to DIN EN16796		kWh/h	20.9	20.9
	6.9	Charger output current		A	115	115
Addition data	8.1	Type of drive control			AC	AC
	10.5	Steering design			Hydraulic	Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	<75	<75

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.









Li-ion High Capacity Truck 18T

EFL1803-HV

Distinguishing mark	1.1	Company brand			TRIA	TRIA
	1.2	Model designation			EFL1803-HV-9	EFL1803-HV-12
	1.3	Drive			Electric	Electric
	1.4	Operator type			seated	seated
	1.5	Load capacity	Q	kg	18000	18000
	1.6	Load center distance	c	mm	900	1200
	1.8	Load distance, centre of drive axle to fork	x	mm	950	950
	1.9	Wheelbase	y	mm	3750	3750
Service weight	2.1	Service weight		kg	24100	26800
	2.2	Axle loading, laden front/rear		kg	38770/3330	41470/3330
	2.3	Axle loading, unladen front/rear		kg	11800/12300	12500/14300
Tyres/chassis	3.1	Tyre type			pneumatic	pneumatic
	3.2	Tyre size, front			12.00-24-24PR	12.00-24-24PR
	3.3	Tyre size, rear			12.00-24-24PR	12.00-24-24PR
	3.5	Wheels, number front/rear (x=drive wheels)		mm	4×/2	4×/2
	3.6	Tread width, front	b10	mm	1880	1880
	3.7	Tread width, rear	b11	mm	2200	2200
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/12	6/12
	4.2	Retracted mast height	h1	mm	3700	3700
	4.3	Free lift	h2	mm	110	110
	4.4	Lift height	h3	mm	4000	4000
	4.5	Height, mast extended	h4	mm	5700	5700
	4.7	Height of overhead guard (cabin)	h6	mm	3220	3220
	4.8	Seat height/standing height	h7	mm	2050	2050
	4.12	Tow coupling height	h10	mm	430	430
	4.19	Overall length	l1	mm	7370	7950
	4.20	Length to face of forks	l2	mm	5550	5550
	4.21	Overall width	b1/b2	mm	2570/2500	2570/2500
	4.22	Fork dimensions	s/e/l	mm	100/220/1820	100/220/2400
	4.24	Fork carriage width	b3	mm	2500	2500
	4.31	Ground clearance, laden, below mast	m1	mm	165	165
	4.32	Ground clearance, center of wheelbase	m2	mm	265	265
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	8145	8725
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	8145	8725
Performance data	4.35	Turning radius	Wa	mm	5175	5175
	5.1	Travel speed, laden/unladen		km/ h	20/20	20/28
	5.2	Lifting speed, laden/unladen		m/s	0.35/0.4	0.4/0.45
	5.3	Lowering speed, laden/unladen		m/s	0.5/0.35	0.5/0.4
	5.5	Drawbar pull, laden/unladen		N	92000/92000	92000/92000
	5.6	Max. drawbar pull, laden/unladen		N	95000/95000	95000/95000
	5.8	Max. gradeability, laden/unladen		%	20/30	20/32
	5.10	Service brake			Hydraulic	Hydraulic
	5.11	Parking brake			Hydraulic	Hydraulic
Electric-engine	6.1	Drive motor rating S2 60 min		kW	90	90
	6.2	Lift motor rating at S3 15%		kW	60	60
	6.4	Battery voltage/nominal capacity		V/Ah	618.24/228	618.24/228
	6.5	Battery weight		kg	932	932
	6.6	Periodic energy consumption according to DIN EN16796		kWh/h	20.9	20.9
	6.9	Charger output current		A	115	115
Addition data	8.1	Type of drive control			AC	AC
	10.5	Steering design			Hydraulic	Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	<75	<75

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

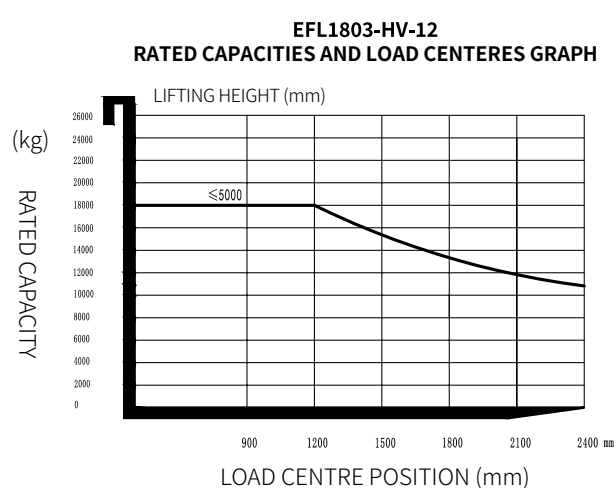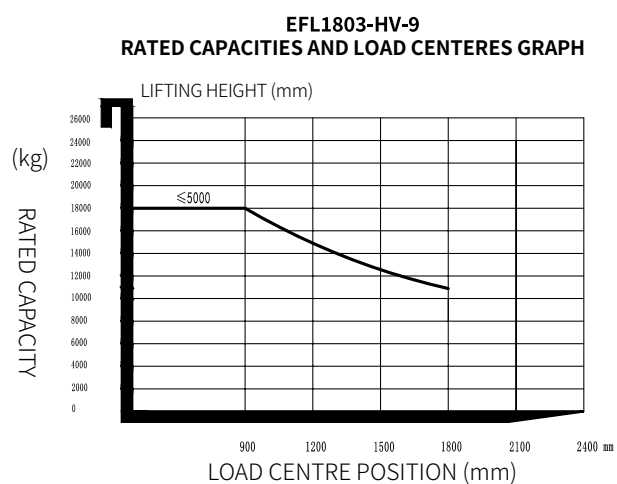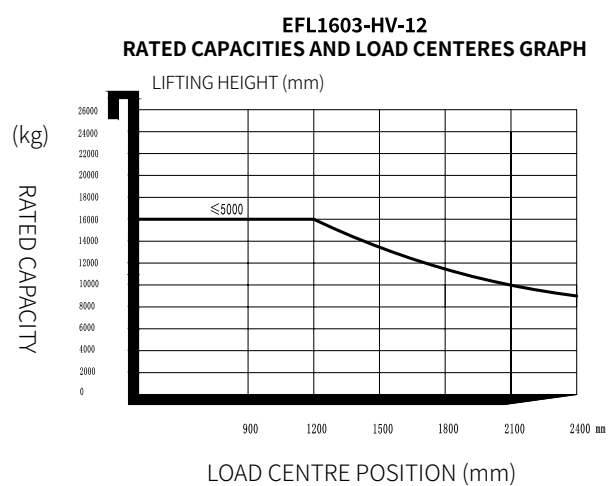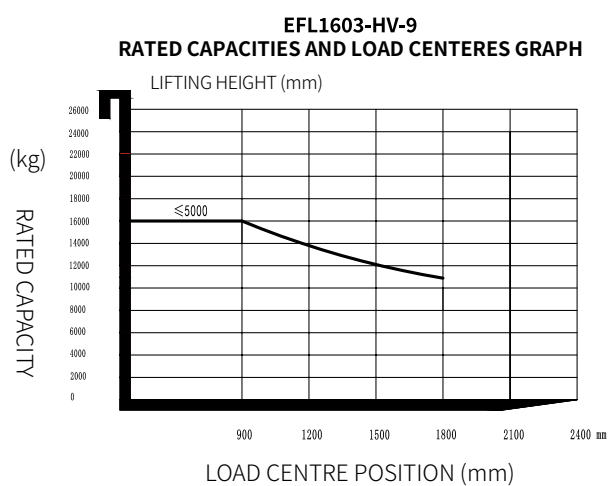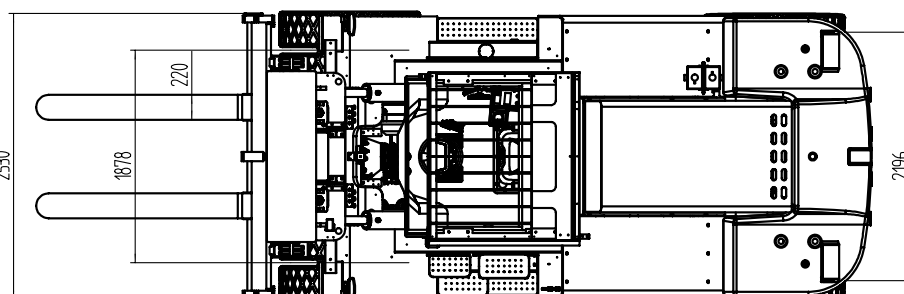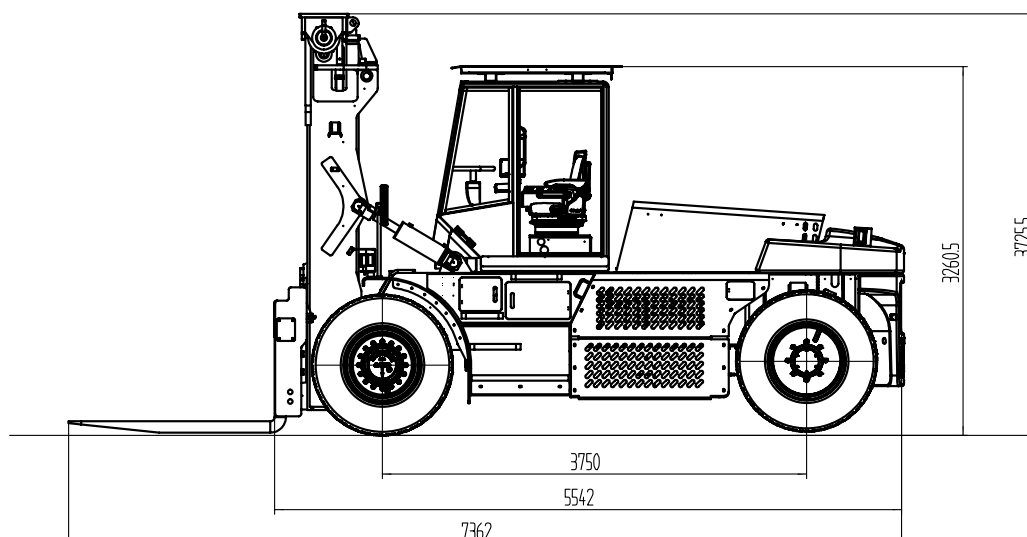

Mast Option

EFL1603-HV

Mast types	Lift height (h3)	Height, Mast			Height,Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest	With backrest
			No backrestW	ith backrest		
	mm	mm	mm	mm	mm	mm
2-Standard Mast	3500	3380	5080	5080	100	100
	4000	3640	5600	5600	100	100
	4200	3690	5740	5740	100	100
	5000	4090	6540	65401	00	100
3-Free Mast	4500	3130	6130	—	1500	—
	4710	3200	6340—		1570	—
	5000	3297	6630	—1	667—	
	5500	3463	7130	—	1833—	
	6000	3630	7630	—	2000	—
	6500	3797	8130—		2167	—
	7000	3963	8630	—2	333—	

EFL1803-HV

Mast types	Lift height (h3)	Height, Mast			Height,Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest	With backrest
			No backrestW	ith backrest		
	mm	mm	mm	mm	mm	mm
2-Standard Mast	3500	3440	5140	5140	110	110
	4000	3700	5700	5700	110	110
	4200	3750	5800	5800	1101	10
	50004	150	6600	66001	10	110
3-Free Mast	4500	3130	6130	—	1500	—
	4710	3200	6340—		1570	—
	5000	3297	6630	—1	667—	
	5500	3463	7130	—	1833—	
	60003	630	7630	—	2000	—
	6500	3797	8130	—2	167	—
	7000	3963	8630—		2333	—